

Declaration of Performance

JNH-KVH-Fi_01_eng

1. Unambiguous ID code of the product type:

**Structural finger jointed solid timber
Product type 1: Spruce**

2. Intended use:

buildings and bridges

3. Manufacturer:

Junginger Naturholzwerk GmbH
Anton-Lutz-Straße 1
D-74405 Gaildorf-Unterrot
Germany

4. Authorized representative:

no external authorized representative

5. System for assessing and verifying the constancy of performance:

System 1

6.a) Harmonized standard:

EN 15497:2014

Notified body:

MPA Stuttgart No. 0672

7. Performance declared:

Essential characteristics as	Performance
Modulus of elasticity, bending, compressive, tensile and shear strength as	
- Mechanical characteristics of the strength classes pursuant to EN 14081-1 for	C 24
- Geometric data	Widths ranging between 60 and 280 mm Heights ranging between 40 and 160 mm
Bonding strength as	
Bending strength of the finger joints	24 N/mm ²
Fire resistance as	
- Geometric data and - Charring rate as species and - Characteristic density	see "mechanical characteristics" see "durability of the bonding strength" see "modulus of elasticity"
Reaction to fire as	
Reaction to fire class	D-s2, d0
Emission of formaldehyde as	
Formaldehyde emission class	E1

Declaration of Performance

JNH-KVH-Fi_01_eng



Release of other dangerous substances	
	not relevant
Durability of the bonding strength as	
- Species and - Adhesive for finger joints	Product type 1: spruce (Picea Abies) PUR EN 15425 I 70 FJ 0,1
Durability against biological attack as	
Natural durability class against wood destroying fungi EN 350-2	DC 5

The characteristics of the above product conform to the performance declared. The above named manufacturer is exclusively responsible for preparing the Declaration of Performance in accordance with regulation EU/305/2011.

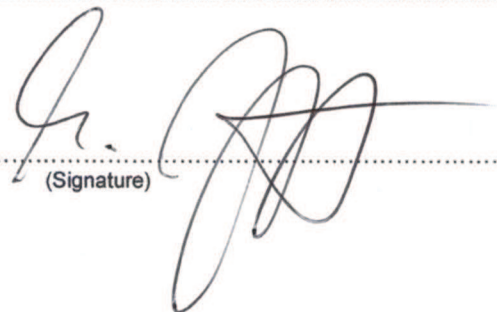
Signed on behalf of the manufacturer and in his name by

Matthias Junginger, Managing Director

.....
(Name and function)

Gaildorf, 27.05.2019

.....
(Place and date of issue)


(Signature)



0672



Junginger Naturholzwerk GmbH
Anton-Lutz-Straße 1
D-74405 Gaildorf-Unterrot
Germany

15

JNH-KVH-Fi

EN 15497:2014

Structural finger jointed solid timber

Product type 1: Spruce

Modulus of elasticity, bending, compressive, tensile and shear strength, bonding strength and fire resistance as

- Geometric data	Widths ranging between 60 and 280 mm Heights ranging between 40 and 160 mm
- Strength class and characteristic raw density	C 24
Reaction to fire	D-s2, d0
Emission of formaldehyde	E1
Durability of the bonding strength as	
- Species	Spruce (<i>Picea abies</i>)
- Adhesive for finger joints	PUR EN 15425 I 70 FJ 0,1
Durability against biological attack	DC 5